



# 01:

## PRODUCT DESCRIPTION SMART POS --AF930




### SMART POS --AF930

AF930 is the most elegantly designed and compact secure electronic payment terminal powered by the Android operating system.

It comes with a 5.5-inch capacitive touch screen, which is high-definition display. A wide range of advanced function options are supported, such as 4G/3G/2G, WFI, Bluetooth, as well as inbuilt NFC contactless, electronic signature capture and the massive amounts enable exceptionally fast processing of applications.

AF930 is compliant with to PCI Certification Standards, with multiple tamper and self-destruction mechanism, on which the payments can be done quickly and safely.



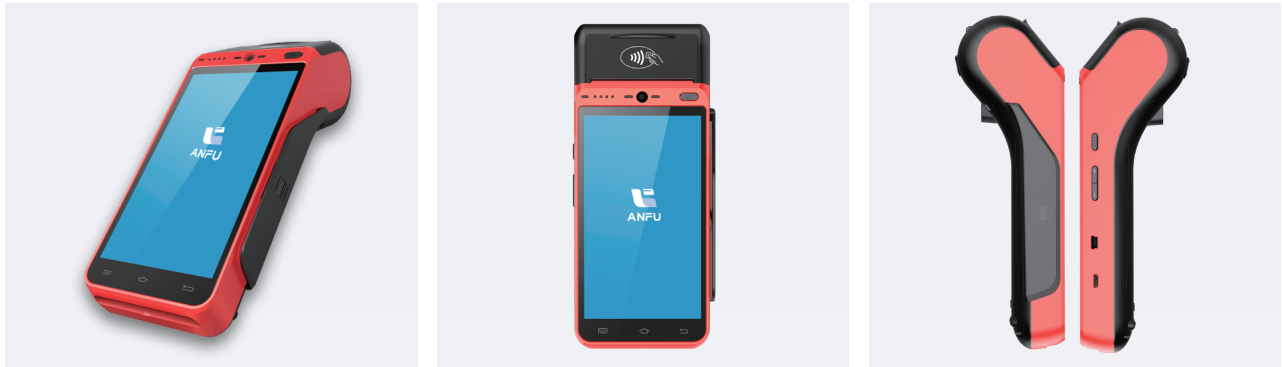

## Specifications

<b>Operating System</b> AnfuOS 1.0 Based on Android 13(Or higher)	<b>Card Slots</b> SIMx 2 + PSAM X 1+ MicroSDx 1
<b>Processor</b> AP:64-bit Quad-Core Cortex A53 2.0G	<b>Positioning</b> GPS/Beidou/Glonass/Galileo (Four choice three combination positioning)
<b>Memory</b> 8GB Flash + 1GB RAM (16 GB Flash + 2GB RAM optional)	<b>Keypad</b> Power button, hatkeys, Volume button +/-
<b>Magnetic Card Reader</b> ISO7811 Track 1/2/3, Bi-Directional	<b>Audio</b> 1 Buzzer   1 Speaker(optional)
<b>IC Card Reader</b> ISO7816.1.8V.3V.5V card supported 4 LED lights display	<b>Ports</b> 1 Type-C USB OTG   3.5mm Earphone hole
<b>NFC Reader</b> ISO14443 type A & B standard,	<b>Indicator lights</b> 1 Power indicator light/4 operation
<b>Camera</b> Front camera: 0.3 million pixelss (optional) Rear camera: 5 million pixels or 2 million pixels, Auto zoom	<b>Adapter</b> Input: AC 100-240V, 50/60Hz Output: 5V/2A
<b>Display</b> 5.5" IPS Screen, 1280x720 HD Capacitive Multi-Point Touch	<b>Scanning charging base</b> Base for easy Scanning and charging (optional)
<b>Wireless Communication</b> Wi-Fi® (2.4G & 5.0G)   4G( LTE )   3G (WCDMA)   2G(GPRS)   Bluetooth®	<b>Weight</b> 440g
<b>Battery</b> Replaceable Lithium polymer battery, 3.7V/5600mAh	<b>Dimensions</b> 192.7(L) x 85(W) x 63.4(H) mm
<b>Printer</b> Print Speed: 70mm/s Paper Roll: 58*40mm	<b>Environment</b> Storage temperature: -20°C to 60°C Operating temperature: -10°C to 50°C Humidity: ≤95%
	<b>Certifications</b> EMV Contact L1/EMV Contact L2/EMV Contactless L1 / Visa PayWave / Mastercard Paypass/American ExpressPay/ PCI PTS 6.x / TQM / CE / JCB/Discover